

FRX-1



ATEX Repeater



ATEX Portable Repeater
E Ex d 11c T5
Zone 1 & 2

Eliminates Radio Black Spots
Increases Radio Coverage

www.ferncom.com - sales@ferncom.com

+44 (0)1502 676 045 - +44 (0)1224 418 092

Lowestoft

Aberdeen



Technical Specifications

General

Freq. range (FRX- 1 U2)	440 - 470MHz
Freq. range (FRX-1 U1)	400 - 440MHz
Freq. range (FRX-1 V2)	146 - 174MHz
Protection rating	IP66
Area classification	Zone 1 & 2
Channel capacity	5
Channel spacing	12.5KHz / 20KHz / 25KHz
Temperature range	-30°C to + 50°C
Battery	Li-ion 6600 mAh 14.8V
Current drain:	
Standby	98mA
Transmit/Receive	610mA
Duty cycle (40%)	20 Hours
Dimensions:	270mm x 310mm x 185mm
Weight:	14kg

Transmitter


RF power output	11C = 1 W (VHF) / (UHF) 11B = 3.5 W (VHF) / (UHF) 11A = 4 W (VHF) / (UHF)
Audio sensitivity	6-8 mV rms @60% peek deviation
Modulation	G3E

Receiver

Sensitivity	12 db SINAD UHF: < 0.35 µV or 116 dBm VHF: < 0.28 µV or 118 dBm
-------------	---

Supplied Accessories

Charger	6.6 Ah Battery Charger
---------	------------------------

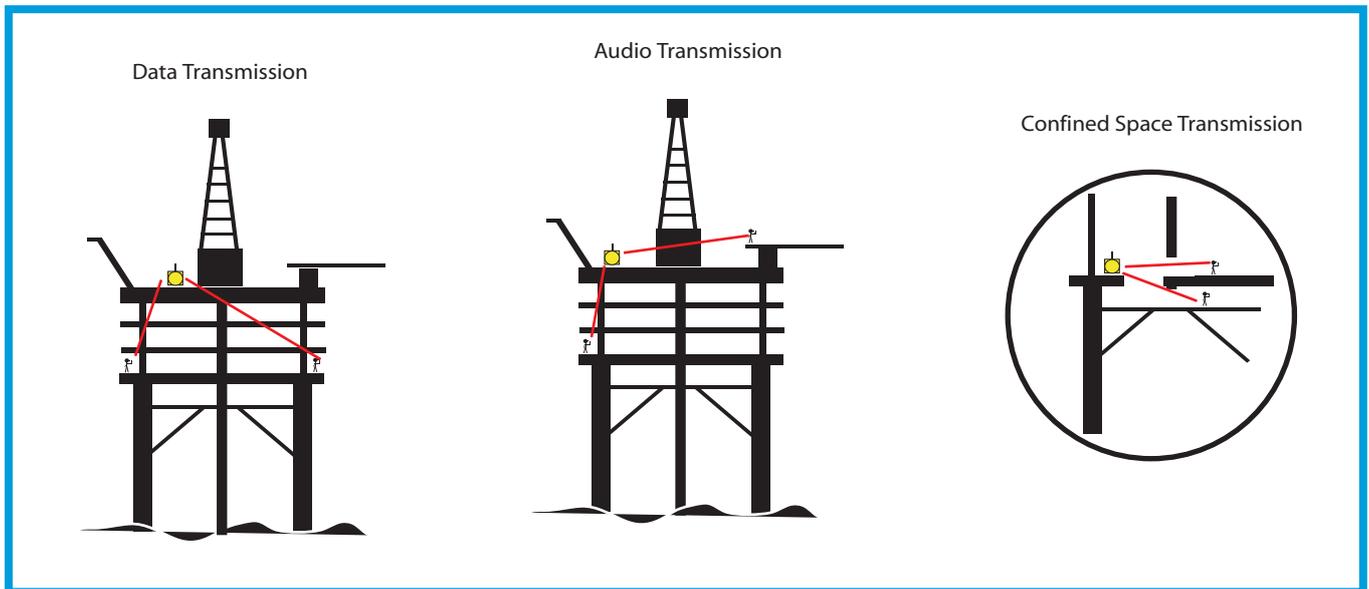

Fern Communications Ltd
Balgownie Technology Centre
Balgownie Drive
Aberdeen
AB22 8GW
UK

Tel: +44 (0)1224 418 092
Fax: +44 (0)1502 440 617
Email:sales@ferncom.com

www.ferncom.com



Fern Communications Ltd
Old Coach House
6 High Street
Wrentham
Suffolk
NR34 7HB
UK

Tel: +44 (0)1502 676 045
Fax: +44 (0)1502 440 617
Email:sales@ferncom.com

www.ferncom.com